




# ME2 | SATA | mSATA SSD

SMART's ME2 mSATA SSDs incorporate the latest generation 3D NAND-technology and SMART Modular's proprietary NVMSentry™ firmware to deliver high performance SSD products with endurance up to one drive writes per day (1 DWPD) for five years. The new ME2 SSDs offer better cost per bit over previous 64-layer and 96-layer NAND generations without sacrificing performance and reliability. Further optimization of the NVMSentry firmware also yields enhancements in read and write consistency over wide ranges of application workloads.

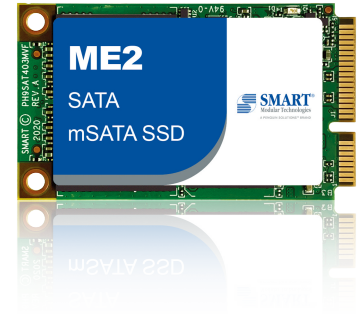

## Features & Benefits

- The Latest Generation 3D NAND Technology
- Quality of Service (QoS) with 3 Nines of Latency Consistency
- 1 DWPD For Five Years
- SEU Mitigation
- SMART's Proprietary NVMSentry Firmware
- TCG OPAL 2.0 and AES 256 Encryption
- End-to-End Data Path Protection
- Support I-Temp (-40°C to +85°C)

## Applications

- Automotive
- Embedded Computing
- Gaming
- Industrial
- Medical
- Transportation

## Product Family Overview

Form Factor	Capacity	Sequential Performance
2.5" SSD	240GB to 1920GB	
M.2 2242 SSD	240GB to 960GB	
M.2 2280 SSD	240GB to 1920GB	Up to 540MB/s Read
mSATA SSD	240GB to 1920GB	Up to 460MB/s Write
Slim SATA SSD	240GB to 1920GB	

## Specifications

ME2   SATA   mSATA SSD	
NAND Type	eTLC
<b>Performance</b>	
Host Interface Rate (maximum)	SATA 3.0 6Gb/s
Capacities	240GB to 1920GB
Sequential Read (maximum)	Up to 540 MB/s
Sequential Write (maximum)	Up to 460 MB/s
Random Read (maximum)	Up to 77K IOPS
Random Write (maximum)	Up to 70K IOPS
<b>Reliability</b>	
MTBF	> 2,000,000 hours
	1920GB: 3755 TBW
Endurance	960GB: 2275 TBW
(JEDEC Enterprise Workload) <sup>1</sup>	480GB: 1015 TBW
	240GB: 510 TBW
DWPD	1
SafeDATA	-
Error Correction	LDPC
<b>Data Security</b>	
Encryption	AES-256, TCG OPAL 2.0
<b>Power</b>	
Input Voltage	VCC: 3.3 V ± 5%
<b>Environmental</b>	
Shock	1500 g half-sine, 0.5 msec, 1 shock along each axis, X, Y, Z in each direction
Vibration	20G rms 80-2000Hz, 1.52mm 20-80Hz, 3 axis
Operating Temperature	Commercial: 0°C to +70°C Industrial: -40°C to +85°C
Storage Temperature	-40°C to +85°C
Humidity	40°C, Operation: 90% RH, Storage: 93% RH
<b>Physical</b>	
Length	50.80 mm
Width	29.85 mm
Height	3.95 mm

<sup>1</sup>Endurance is directly related to the User Specific Workload.

## Ordering Information

Part Number	Density
<b>ME2   SATA   mSATA SSD</b>	
<b>Commercial Operating Temperature (0°C to +70°C)</b>	
SRMST1920FCM2AC4	1920GB
SRMST960GFCM2AC4	960GB
SRMST480GFCM2AC4	480GB
SRMST240GFCM2AC4	240GB
<b>ME2   SATA   mSATA SSD</b>	
<b>Industrial Operating Temperature (-40°C to +85°C)</b>	
SRMST1920FIM2AC4	1920GB
SRMST960GFIM2AC4	960GB
SRMST480GFIM2AC4	480GB
SRMST240GFIM2AC4	240GB
<b>ME2   SATA   mSATA SSD (SEU Mitigation)</b>	
<b>Commercial Operating Temperature (0°C to +70°C)</b>	
SRMST1920FCM2BC4	1920GB
SRMST960GFCM2BC4	960GB
SRMST480GFCM2BC4	480GB
SRMST240GFCM2BC4	240GB
<b>ME2   SATA   mSATA SSD (SEU Mitigation)</b>	
<b>Industrial Operating Temperature (-40°C to +85°C)</b>	
SRMST1920FIM2BC4	1920GB
SRMST960GFIM2BC4	960GB
SRMST480GFIM2BC4	480GB
SRMST240GFIM2BC4	240GB



For more information, please visit: [www.smartm.com](http://www.smartm.com)

*\*Product images are for promotional purposes only. Labels may not be representative of the actual product.*

### Headquarters/North America:

T: (+1) 800-956-7627 • T: (+1) 510-623-1231  
F: (+1) 510-623-1434 • E: [info@smartm.com](mailto:info@smartm.com)

### Latin America:

T: (+55) 11 4417-7200 • E: [sales.br@smartm.com](mailto:sales.br@smartm.com)

### Asia/Pacific:

T: (+65) 6678-7670 • E: [sales.asia@smartm.com](mailto:sales.asia@smartm.com)

### EMEA:

T: (+44) 0 7826-064-745 • E: [sales.euro@smartm.com](mailto:sales.euro@smartm.com)

### Customer Service:

T: (+1) 510-623-1231 • E: [customers@smartm.com](mailto:customers@smartm.com)