


# BGAE340 | eMMC | 153-ball/100-ball

SMART's BGAE340 eMMC is an embedded memory solution that combines 2D-MLC NAND Flash Memory, an embedded MMC (MultiMediaCard) controller, and advanced firmware in a small BGA (Ball Grid Array) package that provides a stable, yet cost effective high-density embedded storage.

SMART's BGAE340 eMMC is compliant to eMMC v5.1 specifications and is available in the standard JEDEC 0.5mm pitch, 153-ball BGA package, as well as 1.0mm pitch, 100-ball BGA package. eMMC can simplify system design because of the widely adopted JEDEC® eMMC standard interface in host system chipsets and operating system software driver support.

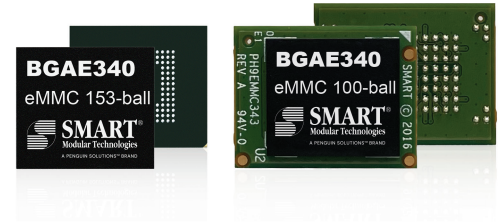

## Features & Benefits

- Compliant to JEDEC v5.1 Standard
- Industrial Temp (-40°C to +85°C) & Wide Temp (-40°C to +105°C)
- Supports Write Protect and Secure Write Protection
- Supports eMMC Device Health Report

## Applications

- Factory Automation
- IIoT
- Medical Devices
- Networking Appliances
- POS Terminals
- RFID Scanners
- Single-Board Computers
- Telecom Infrastructure

## Product Family Overview

Form Factor	Capacity	Sequential Performance
BGAE340 (MLC)	8GB to 16GB	Up to 285MB/s Read Up to 94MB/s Write
BGAE340 (pSLC)	2GB to 4GB	Up to 250MB/s Read Up to 65MB/s Write

## Specifications (BGAE340 MLC)

BGAE340 MLC   100-ball	
NAND Type	MLC
<b>Performance</b>	
Host Interface Rate (maximum)	eMMC v5.1 (HS400)
Capacities	8GB to 16GB
Sequential Read (maximum)	Up to 285MB/s
Sequential Write (maximum)	Up to 94MB/s
Random Read (maximum)	Up to 7290 IOPS
Random Write (maximum)	Up to 2387 IOPS
<b>Reliability</b>	
Endurance	16GB: 40 TBW
(Sequential Workload)	8GB: 20 TBW
Data Retention	10 years
Error Correction	BCH
<b>Power</b>	
Input Voltage	3.3V ± 10%
<b>Environmental</b>	
Operating Shock	1500 g half-sine, 0.5 msec, 1 shock along each axis, X, Y, Z in each direction
Operating Vibration	20G 80-2000Hz, 1.52mm 20-80Hz, 3 axis
Operating Temperature	Industrial: -40°C to +85°C Wide: -40°C to 105°C
Storage Temperature	-40°C to +85°C (for I-Temp) -40°C to +105°C (for W-Temp)
<b>Physical</b>	
Length	14 mm
Width	18 mm
Height	2.45 mm

## Ordering Information (BGAE340 MLC)

Part Number	Density
<b>BGAE340 MLC   eMMC   100-ball</b>	
<b>Industrial Operating Temperature (-40°C to +85°C)</b>	
SPQ8GH2AHI01	8GB
<b>BGAE340 MLC   eMMC   100-ball</b>	
<b>Wide Operating Temperature (-40°C to +105°C)</b>	
SP9QAGH2AHW01	16GB
SP9Q8GH2AHW01	8GB

(Continue on next page)

## Specifications (BGAE340 pSLC)

	BGAE340 pSLC   153-ball	BGAE340 pSLC   100-ball
NAND Type	pSLC	
<b>Performance</b>		
Host Interface Rate (maximum)	eMMC v5.1 (HS400)	
Capacities	2GB to 4GB	4GB
Sequential Read (maximum)	Up to 250MB/s	
Sequential Write (maximum)	Up to 65MB/s	
Random Read (maximum)	Up to 10000 IOPS	
Random Write (maximum)	Up to 2000 IOPS	
<b>Reliability</b>		
Endurance (Sequential Workload)	4GB: 100 TBW 2GB: 50 TBW	
Data Retention	10 years	
Error Correction	BCH	
<b>Power</b>		
Input Voltage	3.3V ± 10%	
<b>Environmental</b>		
Operating Shock	1500 g half-sine, 0.5 msec, 1 shock along each axis, X, Y, Z in each direction	
Operating Vibration	20G 80-2000Hz, 1.52mm 20-80Hz, 3 axis	
Operating Temperature	Industrial: -40°C to +85°C	
Storage Temperature	-40°C to +85°C	
<b>Physical</b>		
Length	11.5 mm	14 mm
Width	13 mm	18 mm
Height	1 mm	2.45 mm

## Ordering Information (BGAE340 pSLC)

Part Number	Density
<b>BGAE340 pSLC   eMMC   153-ball</b> <b>Industrial Operating Temperature (-40°C to +85°C)</b>	
SPM8GH2AH11	4GB
SP9M4GH1AH11	2GB
<b>BGAE340 pSLC   eMMC   100-ball</b> <b>Industrial Operating Temperature (-40°C to +85°C)</b>	
SPQ8GH2AH11	4GB



For more information, please visit: [www.smartm.com](http://www.smartm.com)

*\*Product images are for promotional purposes only. Labels may not be representative of the actual product.*

### Headquarters/North America:

T: (+1) 800-956-7627 • T: (+1) 510-623-1231  
F: (+1) 510-623-1434 • E: [info@smartm.com](mailto:info@smartm.com)

### Latin America:

T: (+55) 11 4417-7200 • E: [sales.br@smartm.com](mailto:sales.br@smartm.com)

### Asia/Pacific:

T: (+65) 6678-7670 • E: [sales.asia@smartm.com](mailto:sales.asia@smartm.com)

### EMEA:

T: (+44) 0 7826-064-745 • E: [sales.euro@smartm.com](mailto:sales.euro@smartm.com)

### Customer Service:

T: (+1) 510-623-1231 • E: [customers@smartm.com](mailto:customers@smartm.com)