


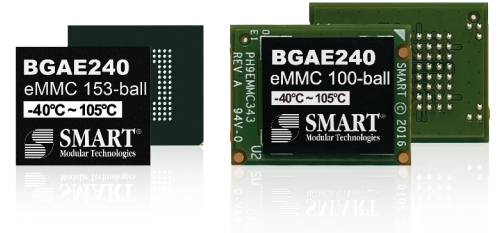
DuraFlash™

BGAE240 | eMMC | 153-ball/100-ball

SMART's DuraFlash BGAE240 eMMC is an embedded memory solution that combines NAND Flash memory, an embedded MMC (MultiMediaCard) controller, and advanced firmware in a small BGA (Ball Grid Array) package that provides stable, yet cost effective high-density embedded storage.

SMART's BGAE240 eMMC solution is available in the standard JEDEC 0.5mm pitch, 153-ball package, as well as an eMMC interposer module which has a footprint and pin-out compatible with the JEDEC Standard 1.0mm pitch, 100-ball package. The 100-ball package offers a solution with large ball pitch and ball diameter which enables lower cost PCB designs, simplifies PCB routing with wider metal traces, resulting in better thermal dissipation.

Wide Temp

 (-40°C to +105°C)



Features & Benefits

- Compliant to JEDEC v5.0 Standard
- Capacities from 4GB to 32GB
- Pre-Configurable to pSLC Enhanced Storage Media Mode
- Wide Temp (-40°C to +105°C)
- VCC = 3.3V and VCCQ = 3.3V or 1.8V

Applications

- Factory Automation
- Medical Devices
- Networking Appliances
- POS Terminals
- RFID Scanners
- Single-Board Computers
- VoIP

Product Family Overview

Form Factor	Capacity	Sequential Performance
BGAE240 (MLC)	8GB to 32GB	Up to 260MB/s Read; Up to 130MB/s Write
BGAE240 (pSLC)	4GB to 16GB	Up to 260MB/s Read; Up to 160MB/s Write

Specifications (BGAE240 MLC)

	BGAE240 MLC 153-ball	BGAE240 MLC 100-ball
NAND Type	MLC	
Performance		
Host Interface Rate (maximum)	eMMC v5.0 (HS400)	
Capacities	8GB to 32GB	
Sequential Read (maximum)	Up to 260 MB/s	
Sequential Write (maximum)	Up to 130 MB/s	
Random Read (maximum)	Up to 6000 IOPS	
Random Write (maximum)	Up to 2200 IOPS	
Reliability		
Endurance (Sequential Workload)	32GB: 56 TBW 16GB: 24 TBW 8GB: 10 TBW	
Data Retention	10 years	
Error Correction	BCH	
Power		
Input Voltage	3.3V ± 10%	
Environmental		
Operating Shock	1500 g half-sine, 0.5 msec, 1 shock along each axis, X, Y, Z in each direction	
Operating Vibration	20G 80-2000Hz, 1.52mm 20-80Hz, 3 axis	
Operating Temperature	Wide: -40°C to +105°C	
Storage Temperature	-40°C to +105°C	
Physical		
Length	11.5 mm	14 mm
Width	13 mm	18 mm
Height	1 mm	2.45 mm

(Continue on next page)

Ordering Information (BGAE240 MLC)

Part Number	Density
BGAE240 MLC eMMC 153-ball Wide Operating Temperature (-40°C to +105°C)	
KTMBGP1CWW01	32GB
KTMAGP1CWW01	16GB
KTM8GP1CWW01	8GB
BGAE240 MLC eMMC 100-ball Wide Operating Temperature (-40°C to +105°C)	
SPQBG1CWW01	32GB
SPQAG1CWW01	16GB
SPQ8GP1CWW01	8GB

Specifications (BGAE240 pSLC)

	BGAE240 pSLC 153-ball	BGAE240 pSLC 100-ball
NAND Type	pSLC	
Performance		
Host Interface Rate (maximum)	eMMC v5.0 (HS400)	
Capacities	4GB to 16GB	
Sequential Read (maximum)	Up to 260 MB/s	
Sequential Write (maximum)	Up to 160 MB/s	
Random Read (maximum)	Up to 5500 IOPS	
Random Write (maximum)	Up to 2200 IOPS	
Reliability		
Endurance (Sequential Workload)	16GB: 215 TBW 8GB: 91 TBW 4GB: 35 TBW	
Data Retention	10 years	
Error Correction	BCH	
Power		
Input Voltage	3.3V ± 10%	
Environmental		
Operating Shock	1500 g half-sine, 0.5 msec, 1 shock along each axis, X, Y, Z in each direction	
Operating Vibration	20G 80-2000Hz, 1.52mm 20-80Hz, 3 axis	
Operating Temperature	Wide: -40°C to +105°C	
Storage Temperature	-40°C to +105°C	
Physical		
Length	11.5 mm	14 mm
Width	13 mm	18 mm
Height	1 mm	2.45 mm

Ordering Information (BGAE240 pSLC)

Part Number	Density
BGAE240 pSLC eMMC 153-ball Wide Operating Temperature (-40°C to +105°C)	
SPMBGP1CWW11	16GB
SPMAGP1CWW11	8GB
SPM8GP1CWW11	4GB
BGAE240 pSLC eMMC 100-ball Wide Operating Temperature (-40°C to +105°C)	
SPQBG1CWW11	16GB
SPQAGP1CWW11	8GB
SPQ8GP1CWW11	4GB



For more information, please visit: www.smartm.com

**Product images are for promotional purposes only. Labels may not be representative of the actual product.*

Headquarters/North America:

T: (+1) 800-956-7627 • T: (+1) 510-623-1231
F: (+1) 510-623-1434 • E: info@smartm.com

Latin America:

T: (+55) 11 4417-7200 • E: sales.br@smartm.com

Asia/Pacific:

T: (+65) 6678-7670 • E: sales.asia@smartm.com

EMEA:

T: (+44) 0 7826-064-745 • E: sales.euro@smartm.com

Customer Service:

T: (+1) 510-623-1231 • E: customers@smartm.com